

	DOCUMENT NUMBER 765-100000-033	REV: B-0	
	STICKER, SS420-X AND SS450-X, DEFAULT PASSWORDS	AUTHOR JOS DOMINGUEZ	DATE 04/30/2019

- 1) Label shall be printed on a Brady label, part number THT-17-489-3 (or equivalent UL 969 PGJ12 label), which is 2 inches wide by 1 inch tall.
- 2) Label shall be organized in the fashion shown in Figure 1 and with similar font (Arial 10 BOLD)
 - a. Note the first field (B's) is the Default Password for Wi-Fi Access (12-20 Characters)
 - b. Note the second field (A's) is the Default Password for User Access (12-20 Characters)

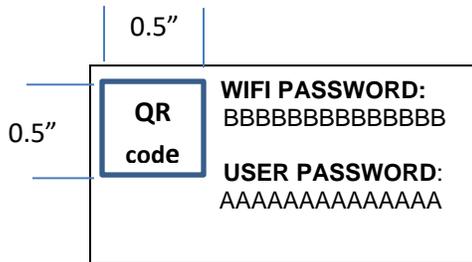


Figure 1

- 3) Information in the QR code is defined in Synapse QR Code Format Standard Document, 801-000012-000, Format Type #05.
- 4) Two (2) labels shall be printed. One to be placed on the Gateway as shown on Figure 2. The other to be kept as a spare with the unit.
- 5) Unless otherwise noted, place sticker as shown below on Figure 2.



Figure 2. Password Label Placement on Gateway